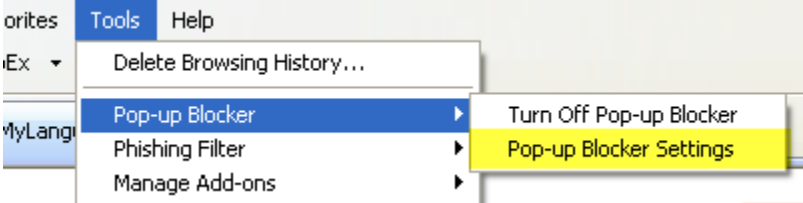


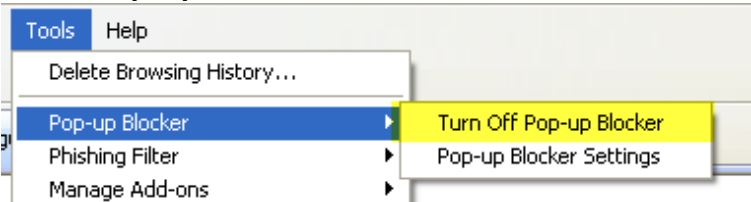
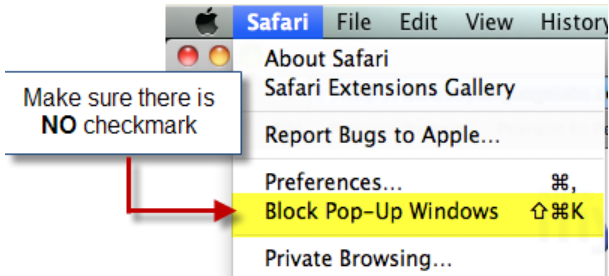
Manage Pop-Up Blockers

As pop-up blockers may interfere with the installation of plug-ins and players used in your course, depending on your preference, you can either allow pop-ups from specific sites or disable browser pop-up blockers for all web sites.

Allow Pop-ups from Specific Sites

Browser	Instructions
Internet Explorer	<p>When you see the yellow “Information Bar” at the top of the web page about a pop-up being blocked, click the bar and select Always allow pop-ups from this site, and click Yes to confirm.</p> <p>–or–</p> <ol style="list-style-type: none"> From the browser Tools menu, select Pop-up Blocker, then Pop-up Blocker Settings. Add *.pearsoned.com, *.pearsoncmg.com, and *.mylanguagelabs.com as allowed sites. Click Close. 
Safari	<p>In Safari you can either enable or disable the pop-up blocker. There is no per-site control. See next section for details on how to disable pop-up blocker.</p>

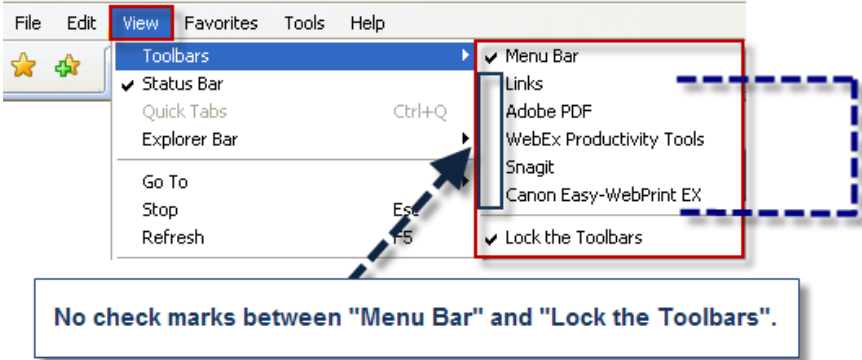
Disable Pop-up Blockers for All Sites

Browser	Instructions
Internet Explorer	<p>From the browser Tools menu, select Pop-up Blocker, then Turn off Pop-up Blocker.</p> 
Safari	<p>From the Safari menu, clear the checkmark for Block pop-up windows.</p> 

THIRD-PARTY POP-UP BLOCKERS (GOOGLE, AOL, YAHOO, ETC.)

While using your course you should disable any third-party pop-up blockers that may be installed in your browser, such as those included with Google, AOL, Yahoo, MSN, EarthLink, and other toolbars. Most third-party toolbars have hidden pop-up blockers and other security features that may block your course.

To check if any of these are active in Internet Explorer:

Browser	Instructions
Internet Explorer 7.x	To permanently disable third-party toolbar pop-up blockers: 1. From the browser View menu, select Toolbars .
Internet Explorer 8.x & Internet Explorer 9.x	2. If any entries are checked between Links and Lock the Toolbars , remove the checkmark for that entry. If you have more than one entry use must repeat this step for each entry to remove the checkmark and disable the pop-up blocker for that toolbar. 

With most popular pop-up blockers, you can allow pop-ups from specific locations. This setting is generally found in the **Settings, Preferences, or Options** portion of your pop-up blocker. For specific instructions, please refer to the online help for your pop-up blocker.

TIPS FOR MANAGING POP-UP BLOCKERS

- Most popular pop-up blockers produce an audio alert when they block a pop-up window. If you have speakers installed, raise your volume so you can hear whether a pop-up blocker is being used.
- Many pop-up blockers let you use the **"Ctrl"** key on your keyboard to allow an individual pop-up window. If you are unsure how to configure your pop-up blocker, hold down the **"Ctrl"** key when clicking the **"Install"** or **"Detect"** buttons on the Installation Wizard.
- It is common to have multiple pop-up blockers installed, so you will need to configure each pop-up blocker. For example, you may have Internet Explorer 7.0 (with Service Pack 2), the Google Toolbar, and Norton Internet Security. Each has its own, independent pop-up blocker that you will have to disable separately.
- Be aware that if you install third-party applications on your computer, the installation process may be configured to install new toolbars by default. You will have to disable pop-up blockers for any toolbar you install. Alternately, during the installation process you can clear the option to install the new toolbar.